



## Undercounter ice maker up to 73 kg - Granular system

Hotel	██████████
Restaurant	██████████
Fast food	██████████
Bar	██████████
Disco	██████████
Fish market	██████████
Supermarket	██████████
Medical & SPA	██████████
Industry	██████████

### ► Position n°



### ► Features & Plus

- Granular ice - 80-82% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Removable and cleanable air filter
- AISI 304 SS evaporator
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- Standard voltages
- HFC free



AISI 304 SS Scotch Brite finish



Removable and cleanable air filter



AISI 304 SS evaporator



Dust-proof water basin



Disappearing insulated door

### ► Prod. 24h

Air temp.	Water temp.		Kg	lb
	10° C	50° F		
7° C	45° F	73	161	
21° C	70° F	67	148	

### ► Certifications available for this model



Crucial Temperature Solutions






Ice Flakes

# GB 601 HC



## Undercounter ice maker up to 73 kg - Granular system

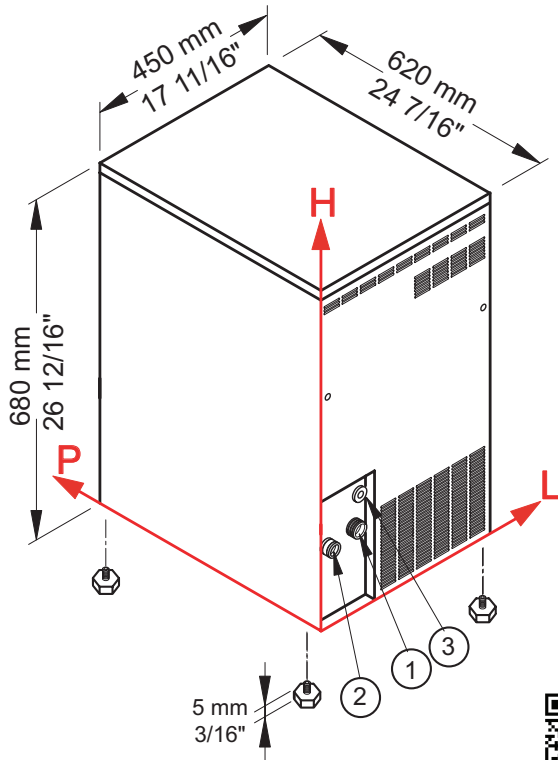

### ► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### ► Performances

Air temperature	Water temperature	Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
10° C	73 kg						
50° F	161 lb						
21° C			67 kg				
70° F			148 lb				
32° C					53 kg		
90° F						117 lb	

### ► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 106 mm / 4 3/16" - 135 mm / 5 5/16" - 3/4"      ② Water out.: 55 mm / 2 3/16" - 140 mm / 5 8/16" - 24 mm / 15/16"
- ③ Electrical connections: 114 mm / 4 8/16" - 218 mm / 8 9/16"

### ► Technical information

Production in 24h	67 kg / 148 lb	Water consumption	A: 1 l/kg - 12,0 gal/100 lb
Store capacity, up to	9 kg / 20 lb	Sizes (L-P-H mm)	450 - 620 - 680
Cooling system	A	(L-P-H in)	17 11/16 - 24 7/16 - 26 12/16
Refrigerant	R290	Sizes with pack (L-P-H mm)	505 - 675 - 850
Standard voltage	220-240 V ~ 50 Hz	(L-P-H in)	19 14/16 - 26 9/16 - 33 7/16
Average power consumption	400 W	Net weight	56 kg / 123 lb
Fuse	10 A	Gross weight	64 kg / 141 lb
Electrical consumption	8 kWh/100kg	Finish	AISI 304 stainless steel, scotch brite

All the technical information need to be considered at the following conditions:  
 Sizes without feet  
 Ambient temperature +21° C  
 Water temperature +15° C  
 Electrical consumption at +32° C (standard voltage)  
 Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 00 - Issued February 2017



BREMA ICE MAKERS SPA

Via dell'Industria 10,  
20020 Villa Cortese (MI), Italy

tel. +39 0331 434811  
fax +39 0331 433833

[www.bremaice.it](http://www.bremaice.it)  
info@bremaice.it

