


BBR 625 W xPRO

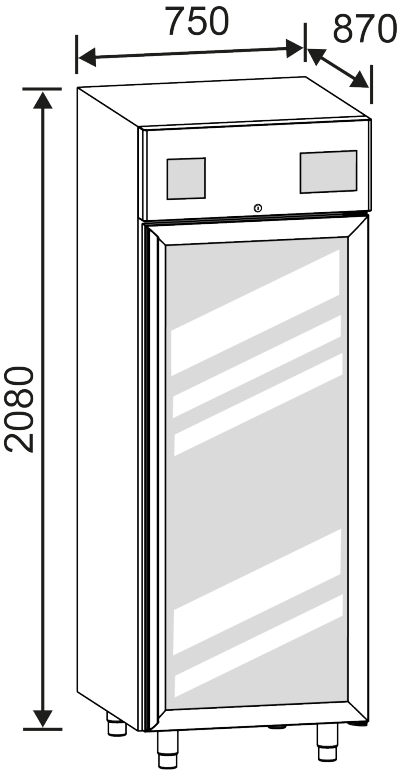

Color: **White**
Panel: **xPRO**

- 3.5" TFT color control panel with capacitive buttons and password
- Automatic test facilities for temperature alarms and functioning status
- Backup battery for managing alarms in case of power failure
- Audible and visual alarms

TECHNICAL FEATURES	
Product Code	ACG251B
Temperature	+4°C
Refrigeration Type	Forced air
Defrost Type	Automatic, with heating resistance

TECHNICAL FEATURES	
Condensate Evaporation	Automatic
Refrigerant Gas	R290
Climatic Class	+16°C / +38°C (ST)
External Dimensions (W x D x H mm)	750 x 870 x 2080

ELECTRICAL DATA	
Power Supply (V/ph/Hz)	220-230/1/50
Power Plug	Type F

STRUCTURAL FEATURES	
Structure	Upright
External Material	Anti-bacterial coated steel white colour
Internal Material	Stainless steel 18/10 AISI 304
Insulation Thickness (mm)	75
Triple-Layer Glass Door	Yes
Door Reversibility	Yes
Automatic Door Closure	Yes
Maximum Shelf Quantity	-
Drawers with extractable slides	7
Drawer Material	Stainless steel 18/10 AISI 304
Plastic Cross Dividers	8 each drawer
Blood Bag Storage Capacity (450 ml)	336

CONTROL PANEL	
Display Type	TFT 3,5"
Languages	ITA - ENG - FRA

CONTROL PANEL

Access Password	Yes
Temperature Graph	Visible on display
Probe Type	Nr. 3 PT1000
Alarm Signaling	Acoustic and visual
Alarm Indications	Text form / codes
Adjustable High/Low Temperature Alarm	Yes
Adjustable Door Open Alarm	Yes
Power Loss Alarm	Yes
Probe Fault Alarm	Yes
Low Battery Alarm	Yes
Dirty Condenser Alarm	Yes
Evaporator Freezing Alarm	Yes
Acoustic Alarm Silencing Options	Yes
Acoustic Alarm Reactivation	Yes
Alarm Functionality Test	Yes
Calibration	Yes
Alarm Memory	30
Door Openings Memory	30 days
Defrost Memory	30 days
USB Port	Optional
Data and Event Storage	Yes (on internal memory)
Dry Contact	Yes (NO)
Backup Battery for Display and Alarms	Yes
Backup Battery Autonomy for Display and Alarms (hours)	48