


MPR 625 W LITE

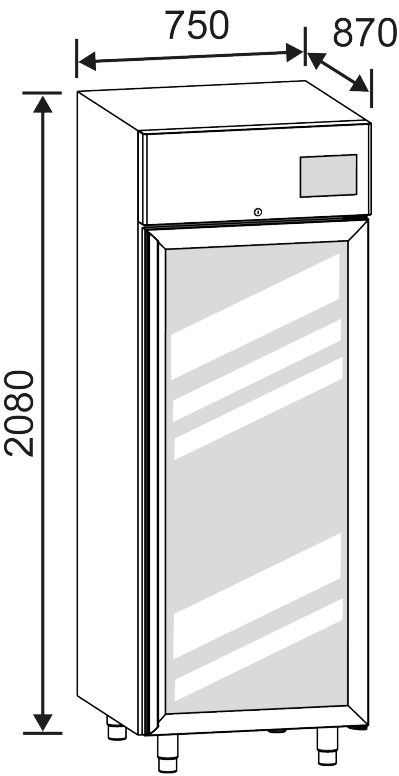

Color: **White**
Panel: **LITE**

- LED backlit control panel
- Temperature display resolution 0,1°C
- Audible and visual alarms
- Dry contact for alarms signal remoting

TECHNICAL FEATURES	
Product Code	AAG250L
Temperature	+2°C / +15°C
Refrigeration Type	Forced air
Defrost Type	Automatic, with heating resistance
Condensate Evaporation	Automatic
Noise Level (dB(A))	a
Refrigerant Gas	R290
Climatic Class	+16°C / +38°C (ST)
Gross Capacity (liters)	a
Net Capacity (liters)	a

TECHNICAL FEATURES	
External Dimensions (W x D x H mm)	750 x 870 x 2080
Internal Dimensions (W x D x H mm)	a
Packaging Dimensions (W x D x H mm)	a
Gross Weight (Kg)	a
Net Weight (Kg)	a
Cage Weight (Kg)	a

ELECTRICAL DATA	
Power Supply (V/ph/Hz)	220-230/1/50
Power Plug	Type F
Energy Consumption (kWh/24h)	9.8
Amperes	4
Watts	550
Refrigerating Power (W)	370
Power (CV)	5/8

STRUCTURAL FEATURES	
Structure	Upright
External Material	Anti-bacterial coated steel white colour
Internal Material	Stainless steel 18/10 AISI 304
Insulation Thickness (mm)	75
Triple-Layer Glass Door	Yes
Door Reversibility	Yes
Automatic Door Closure	Yes
Shelves Number	3
Shelf Material	Wire steel with white colour plastic coating
Shelves Dimensions (W x D mm)	530 x 650

STRUCTURAL FEATURES

Shelf Adjustment Step Range (mm)	84
Maximum Shelf Quantity	-
Shelf Capacity (Kg)	25
Drawers with extractable slides	Optional
Drawer Adjustment Step Range (mm)	84

CONTROL PANEL

Display Type	LED
Access Password	No
Probe Type	Nr. 2 NTC
Alarm Signaling	Acoustic and visual
Alarm Indications	Codes
Adjustable High/Low Temperature Alarm	Yes
Adjustable Door Open Alarm	Yes
Power Loss Alarm	Yes
Probe Fault Alarm	Yes
Acoustic Alarm Silencing Options	Yes
Calibration	Yes
Alarm Memory	10
Dry Contact	Yes (NC)