AC 127 Eco Crucial Temperature Solutions

Self Contained Ice Machine up to 75 kg

Item #:
Project:
Quantity:



FEATURES

CONDENSING

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Routine maintenance visible alarm light on front panel. Water system protected by patented anti-scale system.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.

INTERNAL BIN



AC M 127 Medium Gourmet 20 g Ø 30 x H 34 mm

SYSTEM	CAPACITY				
Air cooled	39 kg				
REFRIGERANT GAS	OPERATING REQUIREMENTS				
R290		Minimum	Maximum		
	Air temperature	10°C	43°C		
VOLTAGE V/Hz/ph	Water temperature	5°C	38°C		
230/50/1	Water pressure	1 bar (14 psi)	5 bar (70 psi)		
	Electrical voltage	-10%	+10%		

fications:



IMPORTANT NOTICE:

and specifications are ithout notice. c sheet is meant for co ose only. For documentation please refer to o

Download our free App Scotsman Ice Apple store Google play Windows store


www.scotsman-ice.it www.scotsman-ice.com Self Contained Ice Machine up to 75 kg

AC 127 Eco



Self Contained Ice Machine up to 75 kg

Item #:
Project:
Quantity:

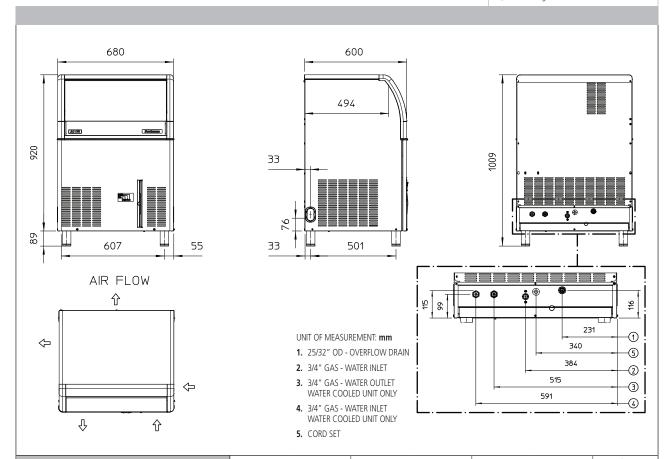

UNIT DATA

Size (W x D x H) 680 x 600 x 1009 mm

Net weight 65 kg

SHIPPING DATA

Carton (W x D x H) 750 x 670 x 1100 mm

Weight 75 kg

		Compressor		Circuit wires		iviax. Tuse size	
Version	Voltage	Btu/h	W	No.	Ømm²	Α	
AC M 127 AS	230/50/1	4777	1400	3	1.5	10	

			24 h ice production kg °C Amb. / °C Water		Energy consumption*		Water usage*	Instant power	
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
AC M 127 AS	Air	230/50/1	75	74	60	21.5	12.9	7.4	670

^(*) Data refer to 32°C Amb. / 21°C Water temperature conditions