


BBR 130 W xPRO



Crucial Temperature Solutions

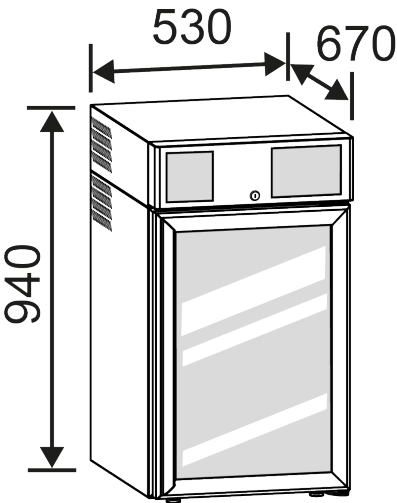

Color: **White**  
Panel: **xPRO**

- 3.5" TFT color control panel with capacitive buttons and password
- Automatic test facilities for temperature alarms and functioning status
- Backup battery for managing alarms in case of power failure
- Audible and visual alarms

| TECHNICAL FEATURES                 |                                    |
|------------------------------------|------------------------------------|
| Product Code                       | ACB301B                            |
| Temperature                        | +4°C                               |
| Refrigeration Type                 | Forced air                         |
| Defrost Type                       | Automatic, with heating resistance |
| Condensate Evaporation             | Automatic                          |
| Refrigerant Gas                    | R290                               |
| Climatic Class                     | +16°C / +38°C (ST)                 |
| External Dimensions (W x D x H mm) | 530 x 670 x 940                    |

| ELECTRICAL DATA        |              |
|------------------------|--------------|
| Power Supply (V/ph/Hz) | 220-230/1/50 |
| Power Plug             | Type F       |

| STRUCTURAL FEATURES                 |  |
|-------------------------------------|--|
| Structure                           | Upright                                  |
| External Material                   | Anti-bacterial coated steel white colour |
| Internal Material                   | Stainless steel 18/10 AISI 304           |
| Insulation Thickness (mm)           | 40                                       |
| Triple-Layer Glass Door             | Yes                                      |
| Door Reversibility                  | Yes                                      |
| Automatic Door Closure              | Yes                                      |
| Maximum Shelf Quantity              | -  |
| Drawers with extractable slides     | 3  |
| Drawer Material                     | Stainless steel 18/10 AISI 304           |
| Plastic Cross Dividers              | 6 each drawer                            |
| Blood Bag Storage Capacity (450 ml) | 81                                       |

| CONTROL PANEL                         |                     |
|---------------------------------------|---------------------|
| Display Type                          | TFT 3,5"            |
| Languages                             | ITA - ENG - FRA     |
| Access Password                       | Yes                 |
| Temperature Graph                     | Visible on display  |
| Probe Type                            | Nr. 3 PT1000        |
| Alarm Signaling                       | Acoustic and visual |
| Alarm Indications                     | Text form / codes   |
| Adjustable High/Low Temperature Alarm | Yes                 |

| CONTROL PANEL  |                          |
|--|--------------------------|
| Adjustable Door Open Alarm                             | Yes                      |
| Power Loss Alarm                                       | Yes                      |
| Probe Fault Alarm                                      | Yes                      |
| Low Battery Alarm                                      | Yes                      |
| Dirty Condenser Alarm                                  | Yes                      |
| Evaporator Freezing Alarm                              | Yes                      |
| Acoustic Alarm Silencing Options                       | Yes                      |
| Acoustic Alarm Reactivation                            | Yes                      |
| Alarm Functionality Test                               | Yes                      |
| Calibration  | Yes                      |
| Alarm Memory   | 30                       |
| Door Openings Memory                                   | 30 days                  |
| Defrost Memory   | 30 days                  |
| USB Port   | Optional                 |
| Data and Event Storage                                 | Yes (on internal memory) |
| Dry Contact  | Yes (NO)                 |
| Backup Battery for Display and Alarms                  | Yes                      |
| Backup Battery Autonomy for Display and Alarms (hours) | 48                       |