


MPR 625 PT W LITE



Crucial Temperature Solutions

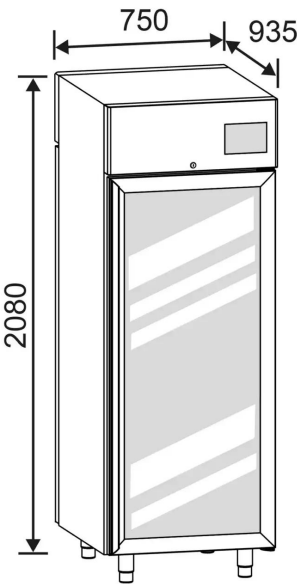

Color: **White**
Panel: **LITE**

- Double triple-glazed glass doors **(one front and one rear)** with full-height handle
- Interior equipped with wire shelves and option to combine shelves and baskets
- Air sterilization LED lamp
- Forced-air refrigeration
- Automatic defrost with condensate evaporation
- LED backlit control panel
- Temperature display resolution 0,1°C
- Audible and visual alarms
- Dry contact for alarms signal remoting

TECHNICAL FEATURES	
Product Code	AAG250LPT
Temperature	+2°C / +15°C
Refrigeration Type	Forced air
Defrost Type	Automatic, with heating resistance
Condensate Evaporation	Automatic
Refrigerant Gas	R290
Climatic Class	+16°C / +38°C (ST)
Gross Capacity (liters)	700
Net Capacity (liters)	625
External Dimensions (W x D x H mm)	750 x 935 x 2080

TECHNICAL FEATURES

Packaging Dimensions (W x D x H mm)	810 x 940 x 2240
-------------------------------------	------------------

ELECTRICAL DATA

Power Supply (V/ph/Hz)	220-230/1/50
Power Plug	Type F
Energy Consumption (kWh/24h)	9.8
Amperes	4
Watts	550
Refrigerating Power (W)	370
Power (CV)	5/8

STRUCTURAL FEATURES

Structure	Upright
External Material	Anti-bacterial coated steel white colour
Internal Material	Stainless steel 18/10 AISI 304
Insulation Thickness (mm)	75
Triple-Layer Glass Door	Yes
Door Reversibility	Yes
Automatic Door Closure	Yes
Internal Lighting Type	LED stripe with UVA for air sterilization
Shelves Number	3
Shelf Material	Wire steel with white colour plastic coating
Shelves Dimensions (W x D mm)	530 x 650
Shelf Adjustment Step	13
Shelf Adjustment Step Range (mm)	89
Maximum Shelf Quantity	13
Shelf Capacity (Kg)	25

STRUCTURAL FEATURES	
Adjustable Steel Feet (from 135 to 160 mm)	4

CONTROL PANEL	
Display Type	LED
Access Password	No
Probe Type	Nr. 2 NTC
Alarm Signaling	Acoustic and visual
Alarm Indications	Codes
Adjustable High/Low Temperature Alarm	Yes
Adjustable Door Open Alarm	Yes
Power Loss Alarm	Yes
Probe Fault Alarm	Yes
Acoustic Alarm Silencing Options	Yes
Calibration	Yes
Alarm Memory	10
Dry Contact	Yes (NC)

ACCESSORIES
Open wire shelf
Stainless steel open wire shelf
Chromium plated open wire basket
Swivel castors with levelling foot
Solid door
Door key locking
Electronic lock Kit (Interlock)
LED alert lights Kit for electronic lock (Interlock)

Ballasted sensor for simulation of the product temperature alarm (available for ADVANCED control panel only)

ACCESSORIES
Internal electrical socket
Porthole with cover Ø 18 mm
Porthole with cover Ø 45 mm
Safety anti-freezing thermostat
GSM/GPRS telephone dialer
Voltage 230V/1ph/60Hz
Plug type A
Plug type B
Plug type G
Plug type I
Wooden crate packing
IQ Documentation
OQ Documentation
PQ Documentation