evosafe ecologic



SNIJDERS ULTRA-LOW TEMPERATURE -86°C FREEZERS HF570-86G



Type	Chest			
Volume total	568,5 litre			
Storage capacity 2" boxes	468			
External dimensions	2060 x 950 x 1098 mm			
Internal dimensions				
	1327 x 570 x 751 mm			
Compartments / Inner doors Main door	1/2			
	With lock and keys			
Inner doors	Forex			
Material internal / external	Stainless Steel/Epoxy Coated steel			
Placed on	Heavy duty castors, in front with brakes			
Insulation	Polyurethane			
Cooling	Two (2) cascade connected compressors			
Refrigerants	First stage: R455A/Second stage: R170			
Condenser	Air-cooled			
Temperature adjustments	-50°C till -86°C (other range; on request)			
Controller	Web-based			
Display	7" Touchscreen			
Temperature history	On display with scroll function			
Data storage	At least 12 months			
Temperature sensors	PT1000			
Backup battery	Alarming and monitoring during power failure			
Alarming	Optical and acoustic, but also possible via E-Mail			
Communication	Telephone dialling activation system			
	Potential (Voltage) free contact			
	RJ45 (Ethernet) connection			
	USB connection			
Software	I-freeze			
CO ₂ -backup system	Partially prepared			
Transit/vacuum release	Ø 26 mm			
Cable entry ports	Two (2)			
Compressor room	Well-arranged layout and very easy filter exchange			
Requirements	220/240 VAC, 50 Hz, fuse 16 Amp. slow			
Power and current rating	800 VA/790 W/3,0 Amp.			
Energy consumption	9,8 kWh/24h			
Heat exchange	0,38 kW/h			
Noise level	52 dBA			
Net weight	335 kg			
CE certified	EN61010-1:2010, EN60601-1-2:2007			





evosafe ecologic

SNIJDERS ULTRA-LOW TEMPERATURE -86°C FREEZERS HF570-86G

OPTIONS

Hybride Cooling System

Water cooling

CO₂-backup system

LN₂-backup system

Extended backup system

Temperature chart recorder

Voltage stabilizer

Transformer

IQ/OQ/PQ

Electronic lock main door


Padlock on main door


Alarming by texting and/or phone

Racking systems in Aluminum or Stainless Steel

Cryo Boxes

Cryo Gloves

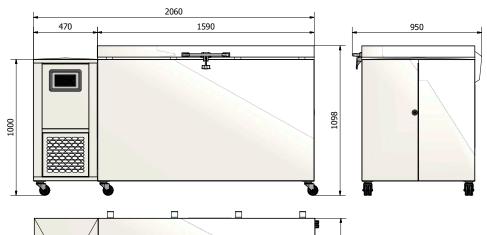

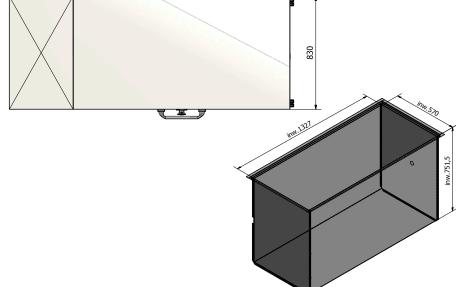



SIDE ACCESS STAINLESS STEEL RACKS*

Model #	# Racks	# Boxes per rack	Total boxes 133x133	Total plates 128x85	Max. height box
VRE-20-35	60	20	-	1200	35 mm
VRE-14-50	60	14	-	840	50 mm
VRS-13-53	36	13	468	-	53 mm
VRS-9-76	36	9	324	-	76 mm
VRS-7-100	36	7	252	-	100 mm

SIDE ACCESS ALUMINUM RACKS*

Model #	# Racks	# Boxes per rack	Total boxes 133x133	Total plates 128x85	Maximum height box
VRA-14-50	60	14	-	840	50 mm
VRA-13-53	36	13	468	-	53 mm
VRA-9-76	36	9	324	-	76 mm
VRA-7-100	36	7	252	-	100 mm
VRA-FLX	36	Flexible	Flexible	Flexible	Flexible

*with locker pin (optional)/other dimensions on request















